


HSE-100 - Headworn Microphone



Umbau von 4-Pol-HSE-Kopfbügelmikrofonen zum Anschluss an JTS-Taschensender
Reconfiguration of 4-pole HSE headband mics for the connection to JTS pocket transmitters

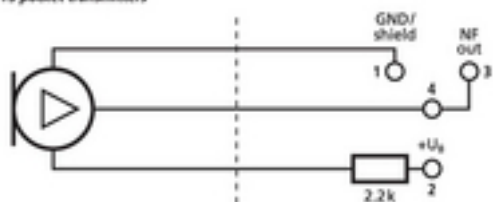

Headband microphone

- High-quality back electret cartridge
- Very linear frequency response, especially resistant to external sound due to its supercardioid polar pattern with high back suppression
- The power supply adapter EMA-1 or a respective power supply is required for operation
- Bare cable ends

Tekniske data

| | |
|-------------------------|-----------------------|
| Description | : headband microphone |
| Version | : - |
| Transmission method | : cable |
| Polar pattern | : supercardioid |
| System | : back electret |
| Carrier frequency range | : - |
| Transmitting power | : - |
| Power supply | : - |
| Operating time | : - |
| Audio frequency range | : 20-20,000 Hz |
| Nominal impedance | : 3 kOhm |
| Sensitivity | : 7 mV/Pa |
| S/N ratio | : - |
| Max. sound pressure | : 120 dB |
| Power supply | : DC 1.3-20 V |
| Gooseneck length | : - |
| Housing material | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Dimensions | : - |
| Weight | : 60 g |
| Cable | : - |
| Connection | : bare cable ends |