


## BR-50 - Bass Rocker

100  
W<sub>MAX</sub>

4Ω

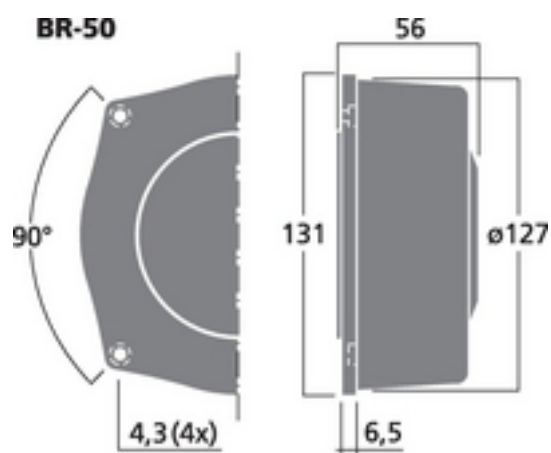

Bass rocker, 50 W, 4 Ohm

- Special technology for producing a structure-borne sound
- Mounting to a seat or also to a floor or dance floor capable of vibrating
- Generates a powerful bass which can physically be felt
- Easy screw mounting
- Connection to suitable power amplifier via basic passive crossover network as for subwoofers, or even better via an individual amplifier
- Series or parallel connection of several BR-50 devices is possible like with common bass speakers
- Resonant frequency: 40 Hz (varies due to mounting to different surfaces)

- Frequency range: approx. 30-300 Hz
- Even mounting surface required of at least 110 x 110 mm
- Dimensions: 131 x 131 x 56 mm
- Weight: 1.232 kg

## Tekniske data

|   |                     |
|---|---------------------|
| Impedance (Z)                             | : 4 Ohm             |
| Transmission method                       | : -                 |
| Frequency range                           | : 30-300 Hz         |
| Resonant frequency (fs)                   | : 40 Hz             |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                 |
| Power rating (RMS)                        | : 50 W              |
| Peak music power output (MAX)             | : 100 W             |
| Sensitivity                               | : no data           |
| Max. rated SPL                            | : -                 |
| Max. voltage                              | : -                 |
| Radiation angle, horizontal               | : -                 |
| Radiation angle, vertical                 | : -                 |
| Suspension compl. (Cms)                   | : -                 |
| Moving mass (Mms)                         | : -                 |
| Mech. Q factor (Qms)                      | : -                 |
| Electr. Q factor (Qes)                    | : -                 |
| Total Q factor (Qts)                      | : -                 |
| Equivalent volume (Vas)                   | : -                 |
| DC resistance (Re)                        | : -                 |
| Force factor (BxL)                        | : -                 |
| Voice coil induct. (Le)                   | : -                 |
| Voice coil diameter                       | : -                 |
| Voice coil former                         | : -                 |
| Linear excursion (X <sub>MAX</sub> )      | : -                 |
| Eff. cone area (Sd)                       | : -                 |
| Magnet weight                             | : -                 |
| Magnet diameter                           | : -                 |
| Mounting cutout                           | : not applicable    |
| Mounting depth                            | : -                 |
| Mounting hole diameter                    | : -                 |
| Hole spacing X-axis                       | : -                 |
| Hole spacing Y-axis                       | : -                 |
| Dimensions                                | : 131 x 131 x 56 mm |
| Outside diameter                          | : ~ 152 mm          |
| Width                                     | : 131 mm            |



|                       |            |
|-----------------------|------------|
| Height                | : 131 mm   |
| Depth                 | : 56 mm    |
| Protective class      | : -        |
| Admiss. ambient temp. | : 0-40 °C  |
| Weight                | : 1.232 kg |
| Packing unit          | : 1        |
| Type of speaker       | : -        |