


## NCJ-5FIS - Combo Mono Chassis Jack

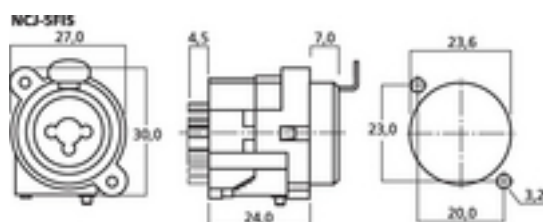

Combo mono panel jack

- 6.3 mm mono jack and 3-pole XLR jack
- Contact rating: &acd; 125 V/7.5 VA

## Tekniske data

|                              |  |
|------------------------------|--|
| Description                  | : mono combo jack                      |
| Type                         | : NEUTRIK panel jack                   |
| Quantity                     | : 1                                    |
| Features                     | : -                                    |
| Colour/colour coding         | : black                                |
| Power rating                 | : -                                    |
| Insulating resistance        | : -                                    |
| Dielectric strength          | : -                                    |
| Certification                | : -                                    |
| Pole number                  | : -                                    |
| Cable inlet                  | : -                                    |
| Suitable cable cross section | : -                                    |
| Connection                   | : 6.3 mm mono jack and 3-pole XLR jack |
| Strain relief                | : -                                    |
| Cable bending protection     | : -                                    |
| Stereo                       | : -                                    |
| Mono                         | : yes                                  |
| Switches                     | : -                                    |
| Material                     | : metal                                |
| Central fixing               | : -                                    |
| Contact type                 | : -                                    |
| No. of contacts              | : -                                    |
| Contact width                | : -                                    |
| Contact distance             | : -                                    |
| Admiss. ambient temp.        | : -30 °C to +80 °C                     |
| Dimensions                   | : -                                    |
| Diameter                     | : -                                    |
| Length                       | : -                                    |
| Weight                       | : 15 g                                 |
| Other features               | : contact rating: &acd; 125Â V/7.5Â VA |