


SA-50 - Amplifier

2 x 25
W MAX

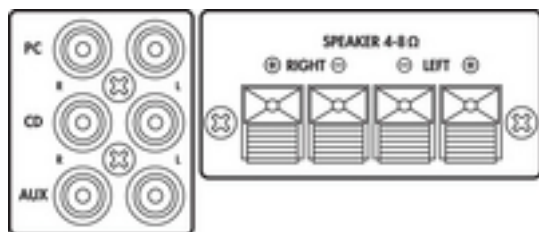

Compact universal stereo amplifier, 25 W

- Silent operation due to fanless cooling concept
- Additional 3.5 mm connection with switchable sensitivity on the front panel
- Audio source selector switch
- Controls for volume, bass and treble
- 6.3 mm headphone output
- Robust metal housing

Tekniske data

| | |
|--|--|
| Peak output power | : 2 x 25 W |
| Power rating | : 25 W |
| Power rating at 2 Ohm | : - |
| Power rating at 4 Ohm | : 2 x 12.5 W |
| Power rating at 8 Ohm | : 2 x 10 W |
| Power rating at 16 Ohm | : - |
| Power rating at 100 V | : - |
| Power rating with 4 Ohm bridged operation | : - |
| Power rating with 8 Ohm bridged operation | : - |
| Output impedance | : - |
| Channels | : 2 |
| Zones | : - |
| Inputs | : 115Â mV/12Â kOhm (PC), 115Â mV/12Â kOhm (CD), 115Â mV/12Â kOhm (aux), 115Â mV/12Â kOhm (player, high), 20Â mV/32Â kOhm (player, low) |
| Attenuation factor | : - |
| Frequency range | : 20-20,000 Hz |
| Crossover network | : - |
| Crossover frequency | : - |
| Integrated limiter | : - |
| Equalizer bass | : ± 12 dB |
| Equalizer midrange | : - |
| Equalizer treble | : ± 12 dB |
| S/N ratio | : ? 65 dB |
| Crosstalk attenuation | : - |
| THD | : - |
| Mains voltage | : \sim 230 V |
| Mains frequency | : 50 Hz |
| Power consumption, operation | : 50 VA |
| Power consumption, standby | : - |
| Standby current | : - |
| Operating voltage (possible alternative) | : - |
| Power supply (possible alternative) | : - |

Admiss. ambient temp.

: 0-40 °C

Width

: 212 mm

Height

: 56 mm

Depth

: 200 mm



| | |
|-----------------|--|
| Rack spaces, RS | : - |
| Weight | : 1.8 kg |
| Connections | : 1 x RCA L/R (PC), 1 x RCA L/R (CD), 1 x RCA L/R (aux), 1 x 3.5 mm jack (player), 4 x spring-load. speaker term. (speakers) |