

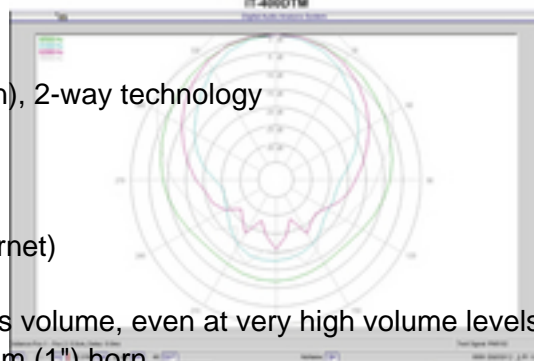


IT-400DTM - (B)DANTE Music Horn

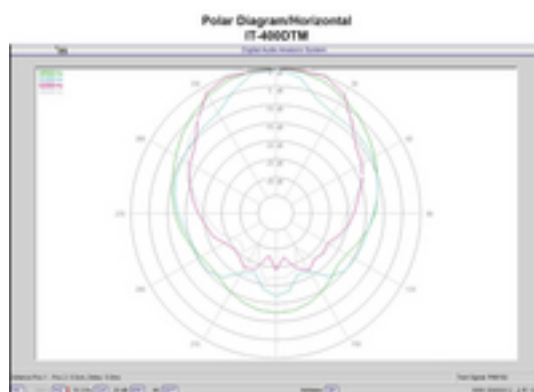

Weatherproof active horn speaker (music horn), 2-way technology

- With integrated Dante(r) module
- 30 W amplifier
- Power supply via PoE (Power over Ethernet)
- Weatherproof and IP66 certified
- Very wideband sound with a distinct bass volume, even at very high volume levels
- 16 cm bass-midrange speaker and 25 mm (1") horn
- Robust plastic housing
- Supplied with mounting bracket and screws made of stainless steel

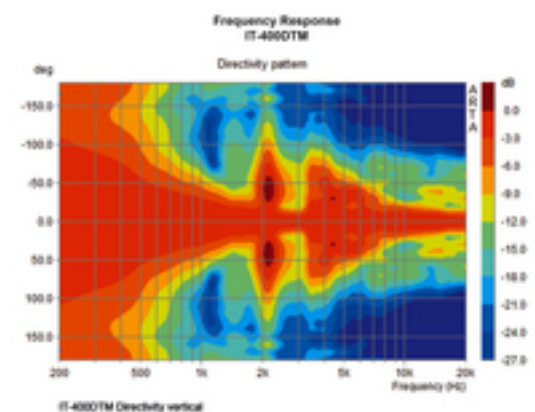

System requirements for Dante(r): Windows 7/8.1/10 or MacOS 10.9.5/10.10.5/10.11

Tekniske data

| | |
|--------------------------------|------------------------------------|
| Active/passive | : active |
| Transmission technology | : Dante ^(r) |
| Total output power | : 30 W |
| Power rating (RMS) | : 30 W |
| Total power rating | : - |
| Power rating (RMS) | : - |
| Impedance | : - |
| Frequency range | : 100-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : Dante ^(r) |
| System | : - |
| Full range speaker | : - |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : 2 |
| Speaker size | : - |
| SPL | : 98 dB/W/m |
| Max. rated SPL | : 113 dB |
| Beam angle | : H: 100°/V: 60° |
| Radiation angle, horizontal | : 100° |
| Radiation angle, vertical | : 60° |
| Features | : 2-way |
| Housing material | : ABS |
| Colour | : grey |
| Mounting device | : stainless steel mounting bracket |
| Protected against ball rebound | : - |
| Protection class | : IP66 |
| Admiss. ambient temp. | : -20 °C to +50 °C |
| Power supply | : PoE |
| Dimensions | : 420 x 335 x 400 mm |
| Width | : 420 mm |
| Height | : 335 mm |
| Depth | : 400 mm |



| | |
|--------------------------------|------------------------|
| Weight | : 6.1 kg |
| Inputs | : 1 x RJ45 |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : weatherproof |
| Accessories | : - |
| Packing dimensions (W x H x L) | : 0.36 x 0.46 x 0.44 m |
| Gross weight | : 7.45 kg |
| Net weight | : 6.1 kg |