


## SP-39 - Speaker

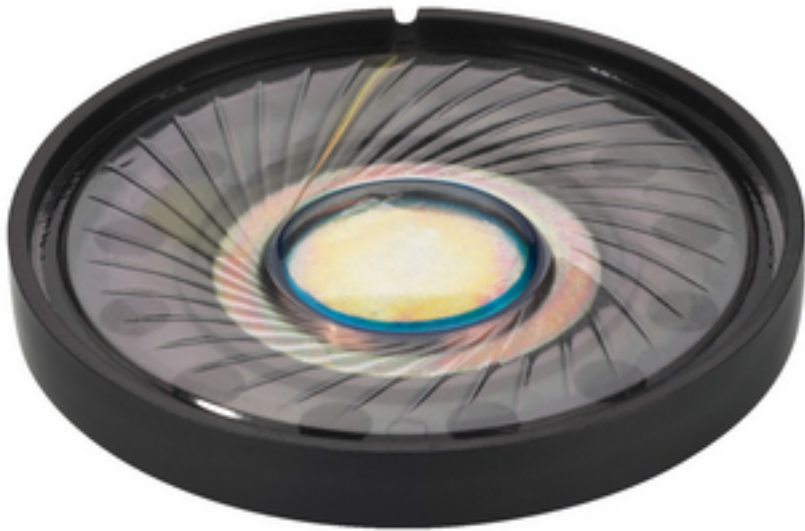

Headphone speaker, 32 Ohm

- For production of headphones, headsets
- For low-level signal processing

## Tekniske data

Impedance (Z)	: 32 Ohm
Transmission method	: -
Frequency range	: f3-20,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: -
Peak music power output (MAX)	: 0.1 W
Sensitivity	: 100 dB/1 V/0.01 m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\varnothing \sim 40$ mm
Mounting depth	: -
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\varnothing \sim 40$ mm x $\varnothing \sim 8$ mm
Outside diameter	: $\varnothing \sim 40$ mm
Width	: $\varnothing \sim 40$ mm



Height	: -
Depth	: 8 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.011 kg
Packing unit	: 1
Type of speaker	: -