


## MPT-005 - Piezo Tweeter

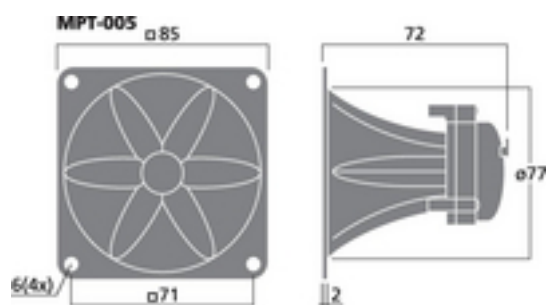

Piezo tweeter

## Tekniske data

|   |   |
|---|---|
| Impedance (Z)                             | : ? 1,000 Ohm                               |
| Transmission method                       | : -   |
| Frequency range                           | : 4,000-20,000 Hz                           |
| Resonant frequency (fs)                   | : -   |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -   |
| Power rating (RMS)                        | : -   |
| Peak music power output (MAX)             | : 115 W (8 Ohm system) 225 W (4 Ohm system) |
| Sensitivity                               | : 94 dB/W/m                                 |
| Max. rated SPL                            | : -   |
| Max. voltage                              | : ~ 30 V                                    |
| Radiation angle, horizontal               | : -   |
| Radiation angle, vertical                 | : -   |
| Suspension compl. (Cms)                   | : -   |
| Moving mass (Mms)                         | : -   |
| Mech. Q factor (Qms)                      | : -   |
| Electr. Q factor (Qes)                    | : -   |
| Total Q factor (Qts)                      | : -   |
| Equivalent volume (Vas)                   | : -   |
| DC resistance (Re)                        | : -   |
| Force factor (BxL)                        | : -   |
| Voice coil induct. (Le)                   | : -   |
| Voice coil diameter                       | : -   |
| Voice coil former                         | : -   |
| Linear excursion (X <sub>MAX</sub> )      | : -   |
| Eff. cone area (Sd)                       | : -   |
| Magnet weight                             | : -   |
| Magnet diameter                           | : -   |
| Mounting cutout                           | : ~ 77 mm                                   |
| Mounting depth                            | : 72 mm                                     |
| Mounting hole diameter                    | : -   |
| Hole spacing X-axis                       | : 71 mm                                     |
| Hole spacing Y-axis                       | : 71 mm                                     |
| Dimensions                                | : 85 x 85 x 72 mm                           |
| Outside diameter                          | : -   |
| Width                                     | : 85 mm                                     |



|                       |            |
|-----------------------|------------|
| Height                | : 85 mm    |
| Depth                 | : 72 mm    |
| Protective class      | : -        |
| Admiss. ambient temp. | : 0-40 °C  |
| Weight                | : 0.055 kg |
| Packing unit          | : 1        |
| Type of speaker       | : -        |