


SPX-20M - HiFi Fullrange Speaker

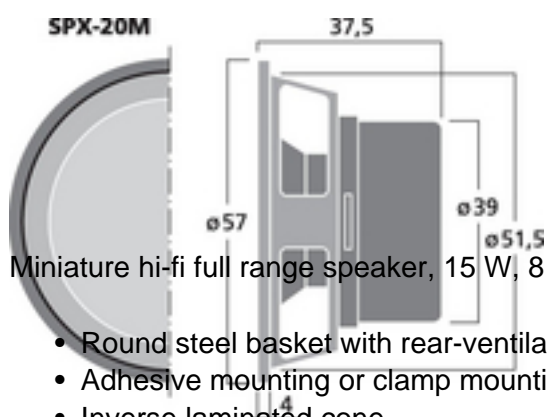

Miniature hi-fi full range speaker, 15 W, 8 Ohm

- Round steel basket with rear-ventilated centering spider
- Adhesive mounting or clamp mounting
- Inverse laminated cone
- Efficient neodymium drive system
- Perfect full range reproduction with an excellent efficiency in relation to its size
- 25 mm voice coil of high power capability

Tekniske data

| | |
|---|--------------------------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission method | : - |
| Frequency range | : f3-22,000 Hz |
| Resonant frequency (fs) | : 157 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 15 W |
| Peak music power output (MAX) | : 30 W |
| Sensitivity | : 87 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 0.76 mm/N |
| Moving mass (Mms) | : 1.3 g |
| Mech. Q factor (Qms) | : 4.52 |
| Electr. Q factor (Qes) | : 0.46 |
| Total Q factor (Qts) | : 0.42 |
| Equivalent volume (Vas) | : 0.2 l |
| DC resistance (Re) | : 6.9 Ohm |
| Force factor (BxL) | : 4.50 Tm |
| Voice coil induct. (Le) | : 0.13 mH |
| Voice coil diameter | : $\varnothing \sim 25$ mm |
| Voice coil former | : Kapton |
| Linear excursion (X _{MAX}) | : ± 0.5 mm |
| Eff. cone area (Sd) | : 13 cm ² |
| Magnet weight | : neodymium |
| Magnet diameter | : $\varnothing \sim 39$ mm |
| Mounting cutout | : $\varnothing \sim 51.5$ mm |
| Mounting depth | : 33.5 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : $\varnothing \sim 57$ mm x 37.5 mm |
| Outside diameter | : $\varnothing \sim 57$ mm |
| Width | : $\varnothing \sim 57$ mm |



| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 37.5 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.17 kg |
| Packing unit | : 1 |
| Type of speaker | : 2" |