


MS-130 - HiFi Midrange Speaker

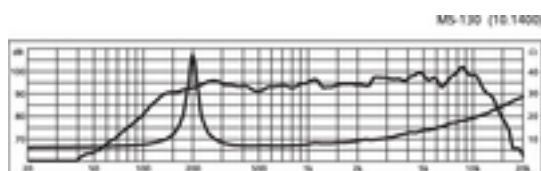

Hi-fi midrange speaker, 40 W, 8 Ohm

- Inverse surround
- Coated cone
- Low moving mass for optimum transient response
- For combinations of a high level stability

Tekniske data

| | |
|-------------------------------------------|--------------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission method | : - |
| Frequency range | : fx-8,000 Hz |
| Resonant frequency (fs) | : 120 Hz |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : 300/6,000Hz |
| Power rating (RMS) | : 40 W |
| Peak music power output (MAX) | : 80 W |
| Sensitivity | : 94 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : 0.44 mm/N |
| Moving mass (Mms) | : 4 g |
| Mech. Q factor (Qms) | : 5.23 |
| Electr. Q factor (Qes) | : 1.06 |
| Total Q factor (Qts) | : 0.88 |
| Equivalent volume (Vas) | : 3 l |
| DC resistance (Re) | : 6.1 Ohm |
| Force factor (BxL) | : 4.20 Tm |
| Voice coil induct. (Le) | : 0.25 mH |
| Voice coil diameter | : $\tilde{\sim}$ 25.5 mm |
| Voice coil former | : Kapton |
| Linear excursion (X _{MAX}) | : \pm 0.7 mm |
| Eff. cone area (Sd) | : 70 cm ² |
| Magnet weight | : 500 g |
| Magnet diameter | : $\tilde{\sim}$ 100 mm |
| Mounting cutout | : $\tilde{\sim}$ 120 mm |
| Mounting depth | : 67 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : 135 x 135 x 70 mm |
| Outside diameter | : - |
| Width | : 135 mm |



| | |
|-----------------------|-----------|
| Height | : 135 mm |
| Depth | : 70 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 1.3 kg |
| Packing unit | : 1 |
| Type of speaker | : 5.25" |