


## SA-50 - Amplifier

2 x 25  
W MAX

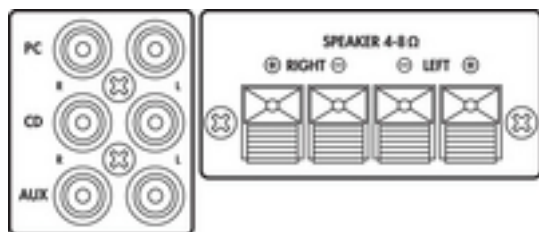

Compact universal stereo amplifier, 25 W

- Silent operation due to fanless cooling concept
- Additional 3.5 mm connection with switchable sensitivity on the front panel
- Audio source selector switch
- Controls for volume, bass and treble
- 6.3 mm headphone output
- Robust metal housing

## Tekniske data

|  |  |
|--|--|
| Peak output power                            | : 2 x 25 W   |
| Power rating                                 | : 25 W   |
| Power rating at 2 Ohm                        | : -  |
| Power rating at 4 Ohm                        | : 2 x 12.5 W   |
| Power rating at 8 Ohm                        | : 2 x 10 W   |
| Power rating at 16 Ohm                       | : -  |
| Power rating at 100 V                        | : -  |
| Power rating with 4 Ohm<br>bridged operation | : -  |
| Power rating with 8 Ohm<br>bridged operation | : -  |
| Output impedance                             | : -  |
| Channels                                     | : 2  |
| Zones  | : -  |
| Inputs                                       | : 115Â mV/12Â kOhm (PC), 115Â mV/12Â kOhm (CD),<br>115Â mV/12Â kOhm (aux), 115Â mV/12Â kOhm<br>(player, high), 20Â mV/32Â kOhm (player, low) |
| Attenuation factor                           | : -  |
| Frequency range                              | : 20-20,000 Hz   |
| Crossover network                            | : -  |
| Crossover frequency                          | : -  |
| Integrated limiter                           | : -  |
| Equalizer bass                               | : $\pm 12$ dB  |
| Equalizer midrange                           | : -  |
| Equalizer treble                             | : $\pm 12$ dB  |
| S/N ratio                                    | : ? 65 dB  |
| Crosstalk attenuation                        | : -  |
| THD  | : -  |
| Mains voltage                                | : $\sim$ 230 V   |
| Mains frequency                              | : 50 Hz  |
| Power consumption, operation                 | : 50 VA  |
| Power consumption, standby                   | : -  |
| Standby current                              | : -  |
| Operating voltage (possible<br>alternative)  | : -  |
| Power supply (possible<br>alternative)       | : -  |

Admiss. ambient temp.

: 0-40 °C

Width

: 212 mm

Height

: 56 mm

Depth

: 200 mm





|                 |  |
|-----------------|--|
| Rack spaces, RS | : -  |
| Weight          | : 1.8 kg   |
| Connections     | : 1 x RCA L/R (PC), 1 x RCA L/R (CD), 1 x RCA L/R (aux), 1 x 3.5 mm jack (player), 4 x spring-load. speaker term. (speakers) |