


## SPE-150/WS - Loudspeaker

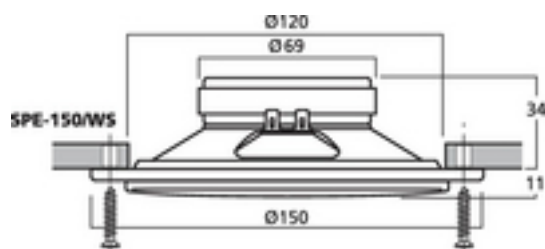

Flush-mount full range speakers, 15 W

- Dual cone
- Slimline design with fixed metal grille

## Tekniske data

Impedance (Z)	: 4 Ohm
Transmission method	: -
Frequency range	: 100-12,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 15 W
Peak music power output (MAX)	: 30 W
Sensitivity	: 89 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\tilde{\text{A}} \sim 120 \text{ mm}$
Mounting depth	: 34 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\text{A}} \sim \tilde{\text{A}} 153 \tilde{\text{A}} \text{ mm} \tilde{\text{A}} \times \tilde{\text{A}} 45 \tilde{\text{A}} \text{ mm}$
Outside diameter	: $\tilde{\text{A}} \sim 153 \text{ mm}$
Width	: $\tilde{\text{A}} \sim 153 \text{ mm}$



Height	: -
Depth	: 45 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 500 g
Packing unit	: 1
Type of speaker	: 130