


SPE-15F/WS - Marine Loudspeaker

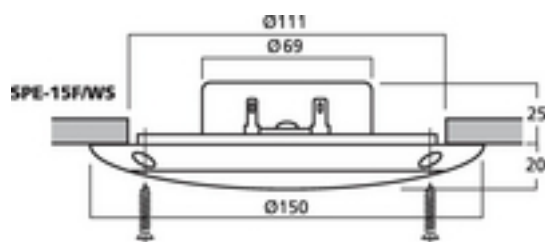

Pair of weatherproof flush-mount PA speakers, 15 W,
with UV-stabilised plastic housing, super slimline design.
Versatile use for PA, car hi-fi, terrace, boat, swimming pool areas.

- Weatherproof polypropylene spaker cone
- Tested according to ASTM B117 (400 h salt spray test)
- Low stray magnetic field
- Supplied with stainless mounting accessories and connection cable

Tekniske data

| | |
|---|---|
| Impedance (Z) | : 4 Ohm |
| Transmission method | : - |
| Frequency range | : 80-16,000 Hz |
| Resonant frequency (fs) | : - |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 15 W |
| Peak music power output (MAX) | : 30 W |
| Sensitivity | : 86 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : 83 g |
| Magnet diameter | : - |
| Mounting cutout | : $\tilde{\sim}$ 111 mm |
| Mounting depth | : 25 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : $\tilde{\sim}$ 150 $\tilde{\sim}$ mm x 45 $\tilde{\sim}$ mm |
| Outside diameter | : $\tilde{\sim}$ 150 mm |
| Width | : $\tilde{\sim}$ 150 mm |



| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 45 mm |
| Protective class | : IP65 |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 270 g |
| Packing unit | : 2 |
| Type of speaker | : 130 |