



## SPE-82/WS - Loudspeaker

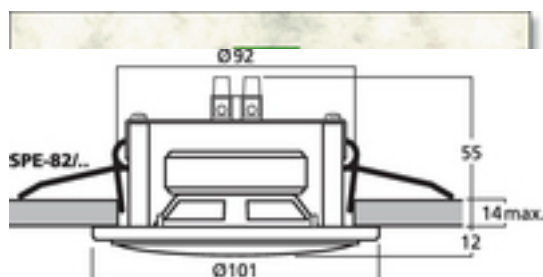


SPE-80/WS

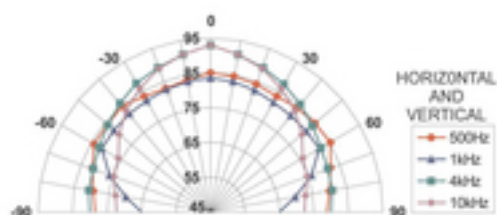

Small flush-mount speakers, 6 W, 4 Ohm

- Chrome (CR) or white (WS) covers
- Similar design to standard flush-mounted halogen lights
- Suitable for speech and background music, very consistent frequency response
- Quick-mounting facility

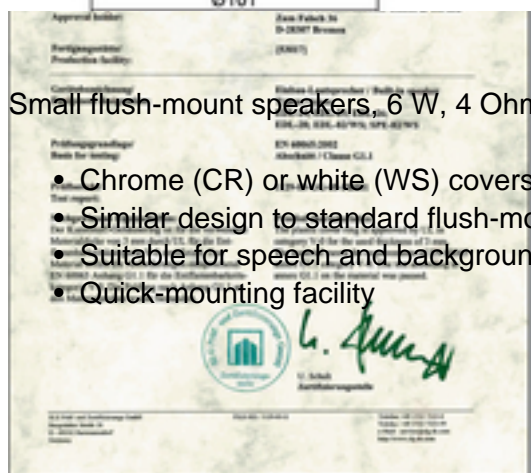

## Tekniske data

Impedance (Z)	: 4 Ohm
Transmission method	: -
Frequency range	: f3-20,000 Hz
Resonant frequency (fs)	: 200 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 6 W
Peak music power output (MAX)	: 12 W
Sensitivity	: 87 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\varnothing$ 96 mm
Mounting depth	: 57 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\varnothing$ 100 mm x 57 mm
Outside diameter	: $\varnothing$ 100 mm
Width	: $\varnothing$ 100 mm



Height	: -
Depth	: 57 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 340 g
Packing unit	: -
Type of speaker	: 75