


HSE-300/SK - Headworn Microphone



Umbau von 4-Pol-HSE-Kopfbügelmikrofonen zum Anschluss an JTS-Taschensender
Reconfiguration of 4-pole HSE headband mics for the connection to JTS pocket transmitters

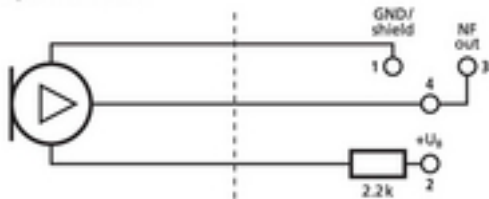

Professional headband microphone, with cardioid polar pattern and a high-quality sound which is suitable for any vocal or speech application. Innovative design features ensure a maximum suppression of both the impact sound and structure-borne noise as well as an extra low acoustic feedback, very comfortable to wear. Beige version.

- Corrosion-resistant neckband, easy to clean
- Drip ring (protects cartridge from moisture)
- Unobtrusive and secure fit due to cable routing in neck area incl. strain relief and cable bending protection
- Stable positioning
- External power supply, e.g. via phantom power supply adapter EMA-1 or EMA-300P
- Microphone windshield
- Bare cable ends

With regard to acoustic feedback, these microphones allow a particularly convenient operation due to the cardioid characteristic.

Tekniske data

| | |
|-------------------------|-----------------------------|
| Description | : headband microphone |
| Version | : - |
| Transmission method | : cable |
| Polar pattern | : cardioid |
| System | : electret |
| Carrier frequency range | : - |
| Transmitting power | : - |
| Power supply | : - |
| Operating time | : - |
| Audio frequency range | : 50-18,000 Hz |
| Nominal impedance | : 2 kOhm |
| Sensitivity | : 2.3 mV/Pa |
| S/N ratio | : - |
| Max. sound pressure | : 120 dB |
| Power supply | : DC 1.5-9 V |
| Gooseneck length | : - |
| Housing material | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Dimensions | : - |
| Weight | : 18 g (w/o cable and plug) |
| Cable | : - |
| Connection | : bare cable ends |