


SP-2RBK - Mini Loudspeaker



Miniature flush-mount speaker, 8 Ohm

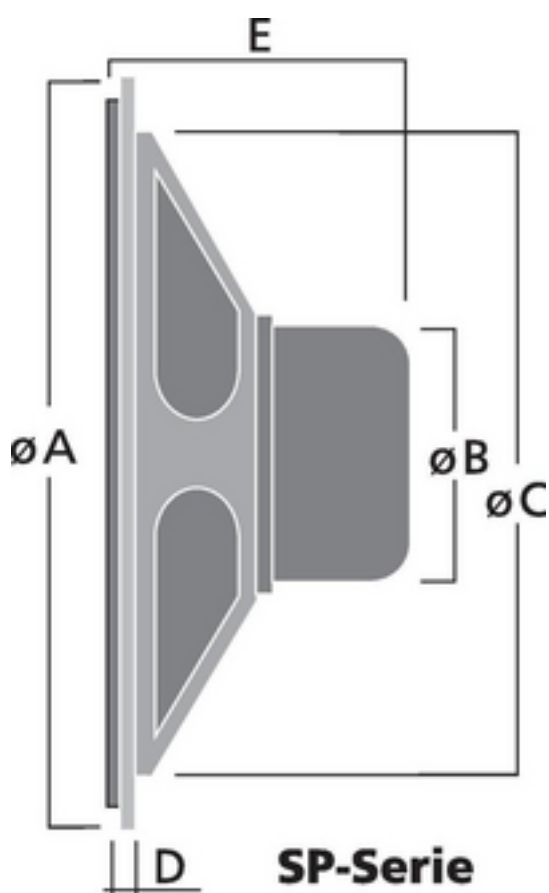

- For general applications in models, intercom systems, miniature radios

Packing unit = 100 pcs.

Miniature flush-mount speakers

Legend scale drawing:

- Width = \varnothing A
- Depth = E
- Magnet diameter = \varnothing B
- Mounting cutout = \varnothing C
- Mounting depth = E-D

Tekniske data

| | |
|---|---------------------------|
| Impedance (Z) | : 8 Ohm |
| Transmission method | : - |
| Frequency range | : 450-15,000 Hz |
| Resonant frequency (fs) | : - |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 0.25 W |
| Peak music power output (MAX) | : - |
| Sensitivity | : power capability: < 1 W |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : - |
| Magnet diameter | : Å~ 22 mm |
| Mounting cutout | : Å~ 45 mm |
| Mounting depth | : 16 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : Å~ 50 mm x 19 mm |
| Outside diameter | : Å~ 50 mm |
| Width | : Å~ 50 mm |



| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 19 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 0.04 kg |
| Packing unit | : 100 |
| Type of speaker | : - |