


PA-4040MPX - Pre-Amplifier

482 mm
19"

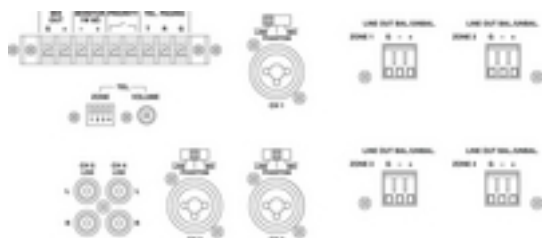

4-zone mixer,
for general multi-room PA applications.

- 4 zones with user-defined routing of all input channels
- 3 inputs microphone/line via comb. jacks
- 2 inputs line stereo via RCA jacks
- Each input channel with gain control, 2-way tone control and zone routing switch
- Microphone inputs with +15 V phantom power, to be switched on as required
- Priority function for channel 1, switchable
- Independent paging input, can be routed to each zone
- 4 zone outputs, can be adjusted individually
- Connection for monitor speaker
- Level control via VU meters for zone and monitor
- Adjustable headphone output
- Mains operation or 24 V emergency power operation

Tekniske data

| | |
|--|---|
| Peak output power | : - |
| Power rating | : - |
| Power rating at 2 Ohm | : - |
| Power rating at 4 Ohm | : - |
| Power rating at 8 Ohm | : - |
| Power rating at 16 Ohm | : - |
| Power rating at 100 V | : - |
| Power rating with 4 Ohm | : - |
| bridged operation | |
| Power rating with 8 Ohm | : - |
| bridged operation | |
| Output impedance | : - |
| Channels | : 5 |
| Zones | : 4 |
| Inputs | : 5 mV/4 kOhm, 100 mV/10 kOhm (mic/line), 100 mV/30 kOhm (line) |
| Attenuation factor | : - |
| Frequency range | : 50-17,000 Hz |
| Crossover network | : - |
| Crossover frequency | : - |
| Integrated limiter | : - |
| Equalizer bass | : ± 10 dB/100 Hz |
| Equalizer midrange | : - |
| Equalizer treble | : ± 10 dB/10 kHz |
| S/N ratio | : ? 65 dB (mic), ? 75 dB (line) |
| Crosstalk attenuation | : - |
| THD | : < 1% |
| Mains voltage | : \sim 230 V |
| Mains frequency | : 50 Hz |
| Power consumption, operation | : 20 VA |
| Power consumption, standby | : - |
| Standby current | : - |
| Operating voltage (possible alternative) | : DC 24 V |
| Power supply (possible alternative) | : DC 600 mA |
| Admiss. ambient temp. | : 0-40 °C |
| Width | : 482 mm |

Height
Depth

: 133 mm
: 220 mm





| | |
|-----------------|---|
| Rack spaces, RS | : 3 |
| Weight | : 4.5 kg |
| Connections | : 3 x combo 6.3 mm/XLR (mic/line), 2 x RCA L/R (line), 4 x plug-in screw terminal (zones), screw terminal (monitor speakers), screw terminal (mix out), screw terminal (paging), screw terminal (priority) |