


## EDL-612EN - PA Ceiling Speaker

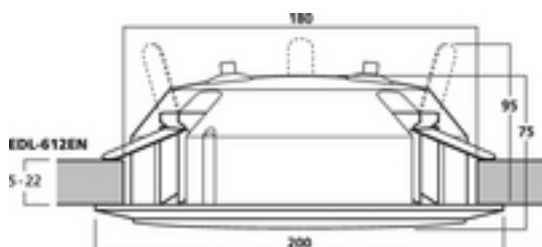

PA ceiling speakers,  
with EN 54-24 certification.

- 100 V line technique with 3 power taps
- Full range speaker with optimised voice reproduction
- Plastic cover with low mounting depth
- For a ceiling thickness from 5 to 22 mm
- Quick installation
- Robust metal basket and protective grille

## Tekniske data

|   |                                |
|---|--------------------------------|
| Impedance (Z)                             | : -                            |
| Transmission method                       | : 100 V                        |
| Frequency range                           | : 120-15,000 Hz                |
| Resonant frequency (fs)                   | : -                            |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : -                            |
| Power rating (RMS)                        | : 12/6/3 W                     |
| Peak music power output (MAX)             | : -                            |
| Sensitivity                               | : 93 dB/W/m                    |
| Max. rated SPL                            | : -                            |
| Max. voltage                              | : -                            |
| Radiation angle, horizontal               | : -                            |
| Radiation angle, vertical                 | : -                            |
| Suspension compl. (Cms)                   | : -                            |
| Moving mass (Mms)                         | : -                            |
| Mech. Q factor (Qms)                      | : -                            |
| Electr. Q factor (Qes)                    | : -                            |
| Total Q factor (Qts)                      | : -                            |
| Equivalent volume (Vas)                   | : -                            |
| DC resistance (Re)                        | : -                            |
| Force factor (BxL)                        | : -                            |
| Voice coil induct. (Le)                   | : -                            |
| Voice coil diameter                       | : -                            |
| Voice coil former                         | : -                            |
| Linear excursion (X <sub>MAX</sub> )      | : -                            |
| Eff. cone area (Sd)                       | : -                            |
| Magnet weight                             | : -                            |
| Magnet diameter                           | : -                            |
| Mounting cutout                           | : $\varnothing$ 180 mm         |
| Mounting depth                            | : 60 mm                        |
| Mounting hole diameter                    | : -                            |
| Hole spacing X-axis                       | : -                            |
| Hole spacing Y-axis                       | : -                            |
| Dimensions                                | : $\varnothing$ 200 mm x 70 mm |
| Outside diameter                          | : $\varnothing$ 200 mm         |
| Width                                     | : $\varnothing$ 200 mm         |

|                       |           |
|-----------------------|-----------|
| Height                | : -       |
| Depth                 | : 70 mm   |
| Protective class      | : -       |
| Admiss. ambient temp. | : 0-40 °C |
| Weight                | : 950 g   |
| Packing unit          | : -       |
| Type of speaker       | : 165     |