


IT-130AK - Active Horn Speaker



new

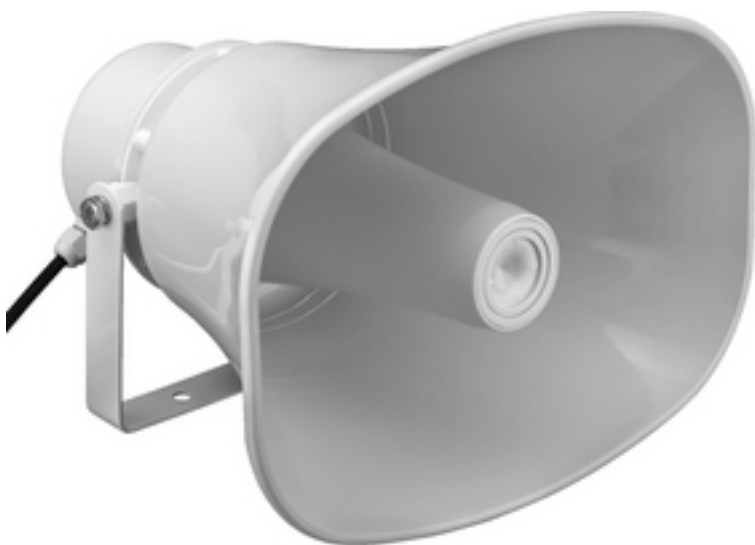

Active weatherproof horn speaker

- Weatherproof and IP66 tested
- Integrated 30 W amplifier
- Volume control
- Easy replaceable connection cables via screw terminals
- Mobile application possible due to voltage supply of 12-24 V DC/2.5 A

Tekniske data

| | |
|--------------------------------|------------------------|
| Active/passive | : active |
| Transmission technology | : cable |
| Total output power | : 30 W |
| Power rating (RMS) | : - |
| Total power rating | : - |
| Power rating (RMS) | : - |
| Impedance | : - |
| Frequency range | : 250-16,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : 750 mV/5 kOhm (line) |
| System | : - |
| Full range speaker | : - |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : 1 |
| Speaker size | : - |
| SPL | : 109 dB/W/m |
| Max. rated SPL | : - |
| Beam angle | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Features | : volume control |
| Housing material | : ABS |
| Colour | : white |
| Mounting device | : mounting bracket |
| Protected against ball rebound | : - |
| Protection class | : IP66 |
| Admiss. ambient temp. | : -20 °C to +50 °C |
| Power supply | : 12-24 V DC/2.5 A |
| Dimensions | : 290 x 215 x 260 mm |
| Width | : 290 mm |
| Height | : 215 mm |
| Depth | : 260 mm |



| | |
|--------------------------------|-------------------------|
| Weight | : 1.5 kg |
| Inputs | : open cable ends |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : weatherproof |
| Accessories | : - |
| Packing dimensions (W x H x L) | : 0.218 x 0.285 x 0.3 m |
| Gross weight | : 1.84 kg |
| Net weight | : 1.5 kg |