


# SPL-2 - Limiter

482 mm  
19"

**DATEQ**  
*audio technologies*

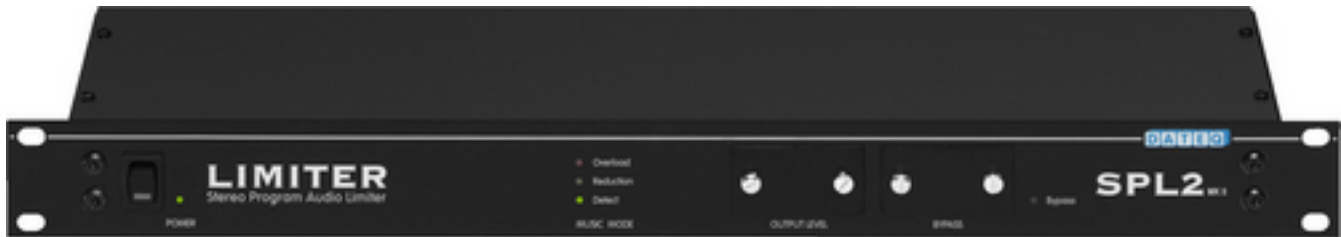

2-channel limiter

- Adjustable via threshold and output
- For sealing
- XLR inputs and outputs

## Tekniske data

|                       |  |
|-----------------------|--|
| Description           | : 2-channel limiter  |
| Frequency range       | : 20-20,000 Hz   |
| Control range         | : -  |
| Control frequencies   | : -  |
| Input signal          | : -  |
| Input sensitivity     | : -  |
| Input impedance       | : 10 kOhm  |
| Output signal         | : -  |
| Output impedance      | : 600 Ohm  |
| Gain                  | : -  |
| Phantom power         | : -  |
| Compression           | : -  |
| Gate ratio            | : -  |
| Crossover frequency   | : -  |
| High-pass filter      | : -  |
| Low cut               | : -  |
| Transmission ratio    | : -  |
| S/N ratio             | : ? 80 dB  |
| Channel separation    | : -  |
| THD                   | : < 0.05%  |
| Admiss. ambient temp. | : 0-40 °C  |
| Power supply          | : &acd; 230 V/50 Hz/10 W   |
| Dimensions            | : 482 x 45 x 175 mm  |
| Weight                | : 3.2 kg   |
| Inputs                | : 2 x XLR, bal.  |
| Outputs               | : 2 x XLR, bal.  |
| Other features        | : limiter threshold: -14 to +6 dBu,output attenuation: 0 to -40 dB |