


NLT4MPXX - Speakon Chassis Jack, IP54

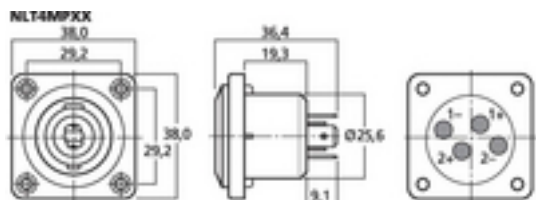

NEUTRIK SPEAKON Connectors

Series of Speakon connectors for professional speaker connection technology. Robust design, latching device, all-insulated contacts, cable inlet with self-adjusting clamps.

- Contact resistance: < 2 mOhm
- Current rating: 50 A (music signal)
- Self-extinguishing according to UL 94V-0

NEUTRIK SPEAKON panel jack

- Weatherproof
- 4 poles
- With metal plate

Tekniske data

| | |
|------------------------------|-----------------------------------|
| Description | : panel jack |
| Type | : NEUTRIK SPEAKON |
| Quantity | : 1 |
| Features | : weatherproof, IPX4, metal plate |
| Colour/colour coding | : silver |
| Power rating | : - |
| Insulating resistance | : - |
| Dielectric strength | : - |
| Certification | : UL 94 V-0 |
| Pole number | : 4 |
| Cable inlet | : - |
| Suitable cable cross section | : - |
| Connection | : 4-pole SPEAKON jack |
| Strain relief | : - |
| Cable bending protection | : - |
| Stereo | : - |
| Mono | : - |
| Switches | : - |
| Material | : plastic |
| Central fixing | : - |
| Contact type | : - |
| No. of contacts | : - |
| Contact width | : - |
| Contact distance | : - |
| Admiss. ambient temp. | : -30 °C to +80 °C |
| Dimensions | : 38 x 38 x 36.4 mm |
| Diameter | : - |
| Length | : - |
| Weight | : 53 g |
| Other features | : - |