


## MXT-52MP3 - In-wall Mixer

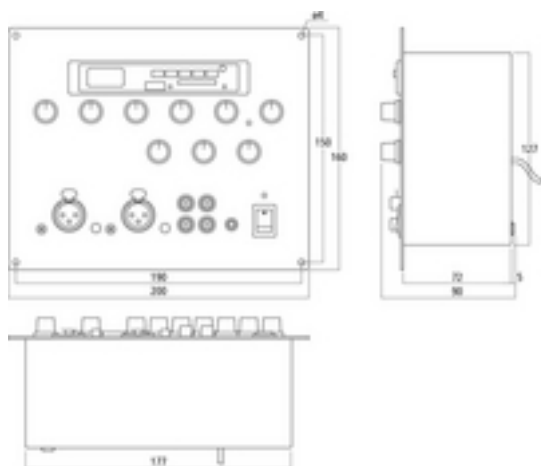

Mixer with integrated MP3 player,  
for flush-mounting into walls.

- 2 balanced microphone/line inputs (XLR), each with gain control and selectable phantom power
- 2 line inputs (RCA L/R)
- 1 aux input (3.5 mm jack)
- Integrated MP3 player with USB interface and SD/MMC card slot, including remote control
- Each input with level control
- Output with 2-way tone control and level control

- LED for indicating clip and operating status
- Metal housing with rear cover for protection against dirt

## Tekniske data

No. of channels	: 6
No. of inputs	: 5
Mic input	: 1 mV, 2 x XLR, bal.
Line input	: 230 mV, 2 x XLR, bal. 160 mV, 2 x RCA L/R
CD input	: -
Phono input	: -
Tape (play)	: -
Aux input	: 160 mV, 1 x 3.5 mm jack
Insert input	: -
Effect return	: -
Master output	: 1-10 V, terminal, mono, bal.
Record output	: -
Monitor output	: -
Booth output	: -
Aux output	: -
Insert output	: -
Effect send	: -
Control room	: -
Tape (rec)	: -
Headphones	: -
Gooseneck lamp	: -
WiFi	: -
USB	: yes
<b>Bluetooth</b>	: -
Frequency range	: 20-20,000 Hz
THD	: < 0.03%
S/N ratio	: ? 78 dB
Crosstalk	: -
Equalizer bass	: $\pm 10$ dB/100Â Hz
Equalizer midrange	: -
Equalizer treble	: $\pm 10$ dB/12Â kHz
equalizer	: -
Talkover	: -
Phantom power	: 19 V
Crossfader	: -

Media player	: MP3, USB
Amplifier	: -
Power supply	: DC/± 24 V/250 mA
Mains voltage	: 24 V
Mains frequency	: -
Power consumption, operation	: -
Operating voltage (possible alternative)	: -
Power supply (possible alternative)	: -
Admiss. ambient temp.	: 0-40 °C
Width	: 200 mm
Height	: 160 mm
Depth	: 90 mm
Rack spaces, RS	: -
Weight	: 1.25 kg