


EDL-11TW/SW - PA Loudspeaker

100V

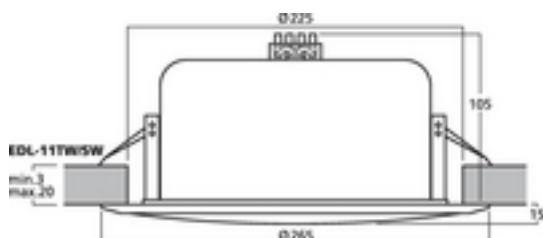

PA ceiling speakers

- 100 V line technique
- White or black metal housing
- Including fire protection cover for a high safety level
- Additional integrated tweeter
- Quick-mounting facility
- For a ceiling thickness from 3 to 20 mm

Tekniske data

| | |
|---|---|
| Impedance (Z) | : - |
| Transmission method | : 100 V |
| Frequency range | : 60-20,000 Hz |
| Resonant frequency (fs) | : - |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 10/5/2.5 W |
| Peak music power output (MAX) | : - |
| Sensitivity | : 97 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : - |
| Magnet diameter | : - |
| Mounting cutout | : $\sim 225 \text{ mm} \times 110 \text{ mm}$ |
| Mounting depth | : 105 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : $\sim 264 \text{ mm} \times 120 \text{ mm}$ |
| Outside diameter | : $\sim 264 \text{ mm}$ |
| Width | : $\sim 264 \text{ mm}$ |

| | |
|-----------------------|-----------|
| Height | : - |
| Depth | : 120 mm |
| Protective class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Weight | : 1.6 kg |
| Packing unit | : - |
| Type of speaker | : 200 |