


## EDL-606 - PA Loudspeaker

100V

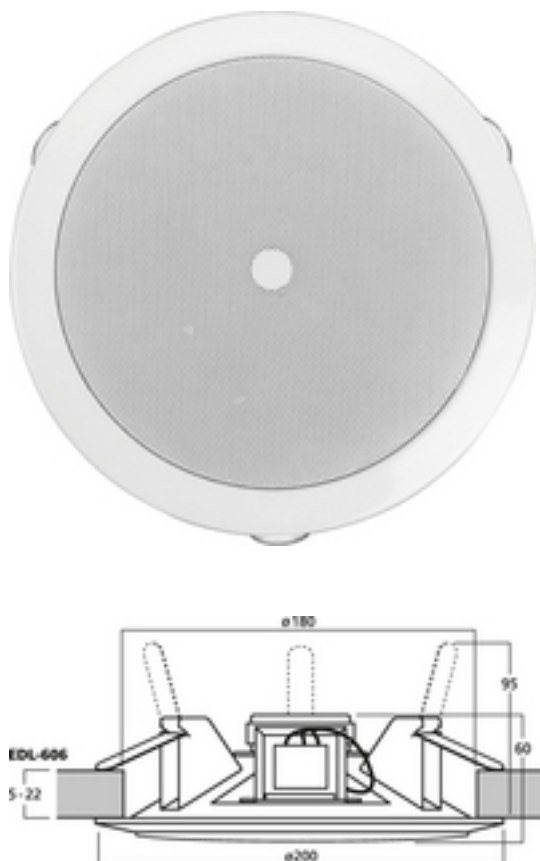

### PA ceiling speakers

- 100 V line technique via audio transformer with power taps
- For a ceiling thickness from 5 to 22 mm
- Full range speaker, type 165
- A more powerful reproduction of the range of fundamental notes
- Robust metal version (basket and protective grille)

## Tekniske data

Impedance (Z)	: -
Transmission method	: 100 V
Frequency range	: 100-20,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 6/3/1.5 W
Peak music power output (MAX)	: -
Sensitivity	: 92 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\varnothing$ 180 mm
Mounting depth	: 50 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\varnothing$ 200 mm x 60 mm
Outside diameter	: $\varnothing$ 200 mm
Width	: $\varnothing$ 200 mm



Height	: -
Depth	: 60 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 698 g
Packing unit	: 1
Type of speaker	: 165