


DRIVE-12P - PA Loudspeaker

12/2


500
W_{MAX}

new



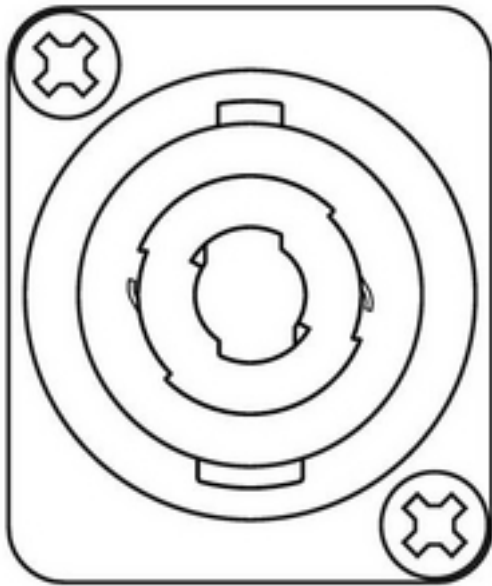

INPUT

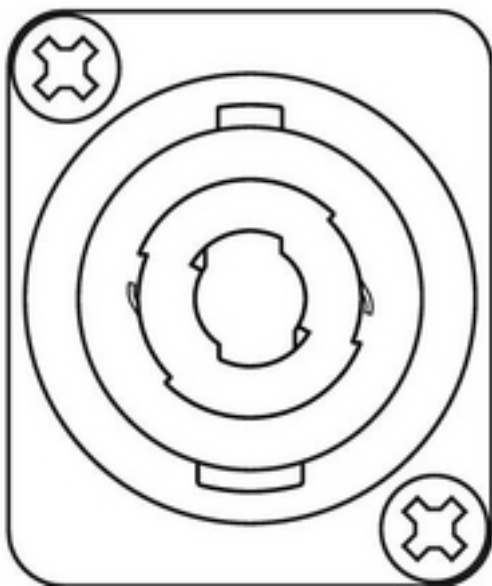

With the passive speaker systems of the DRIVE series, you will get robust and easy-to-use PA speakers which are suitable for versatile applications. These robust and high-quality cabinets made of birch plywood are suitable for general use. The arrangement of the handles allow for easy manageability.

Professional PA speaker system, 500 W

- Compact 12/2 full range system with cabinet made of birch plywood
- 30 cm (12") bass speaker and 25 mm (1") horn tweeter, can be turned by 90°
- Protective circuit for the tweeter
- Excellent sound characteristics
- High-quality coating and neat workmanship
- Multi-purpose positioning and installation options
- Horn tweeter with consistent radiation pattern

- M8 threaded inserts for suspended installation
- 2 x SPEAKER terminal IN/OUT
- Stand sleeve

Tekniske data

Active/passive	: passive
Transmission technology	: cable
Total output power	: -
Power rating (RMS)	: -
Total power rating	: 500 W
Power rating (RMS)	: 250 W
Impedance	: 8 Ohm
Frequency range	: 45-20,000 Hz
THD	: -
S/N ratio	: -
Input signal	: -
System	: 12/2 full range
Full range speaker	: -
Bass speaker	: 30 cm (12") bass speaker
Midrange speaker	: -
Tweeter	: 25 mm (1") horn tweeter
Number of speakers	: 2
Speaker size	: 30 cm (12")
SPL	: 98 dB/W/m
Max. rated SPL	: 123 dB
Beam angle	: H: 90°/V: 60°, horn can be turned
Radiation angle, horizontal	: 90°
Radiation angle, vertical	: 60°
Features	: -
Housing material	: birch plywood
Colour	: black
Mounting device	: M8 threaded inserts, stand sleeve
Protected against ball rebound	: -
Protection class	: -
Admiss. ambient temp.	: 0-40 °C
Power supply	: -
Dimensions	: 360 x 620 x 380 mm
Width	: 360 mm
Height	: 620 mm
Depth	: 380 mm

Weight	: 15.9 kg
Inputs	: 1 x SPEAKER jack
Outputs	: 1 x SPEAKER jack par. out
Replacement voice coil	: -
Other features	: -
Accessories	: -
Packing dimensions (W x H x L)	: 0.49 x 0.77 x 0.47 m
Gross weight	: 20.52 kg
Net weight	: 15.9 kg